

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7: F42D 5/00, 1/045, F42C 15/42		A1	(11) International Publication Number: WO 00/63636
			(43) International Publication Date: 26 October 2000 (26.10.00)
(21) International Application Number: PCT/AU00/00351 (22) International Filing Date: 20 April 2000 (20.04.00) (30) Priority Data: 99/2823 20 April 1999 (20.04.99) ZA (71) Applicant (for all designated States except US): EXPERT EXPLOSIVES (PROPRIETARY) LIMITED [ZA/ZA]; 30 High Street, 2065 Modderfontein (ZA). (71) Applicant (for AU only): HUNTSMAN, Peter, Harold [AU/AU]; 1 Little Collins Street, Melbourne, VIC 3000 (AU). (72) Inventors; and (75) Inventors/Applicants (for US only): DRAGNE, Livia [RO/ZA]; 6 Pluto Avenue, Wilropark, 1724 Gauteng (ZA). PATZ, Vivian, Edward [ZA/ZA]; 314 Highland Road, Kensington, 2019 Johannesburg (ZA). HOOGENBOEZEM, Christiaan [ZA/ZA]; 76 Van Riebeeck Ave., 1619 Kempton Park (ZA). (74) Agents: HUNTSMAN, Peter, Harold et al.; Davies Collison Cave, 1 Little Collins Street, Melbourne, VIC 3000 (AU).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.	

(54) Title: METHOD OF AND SYSTEM FOR CONTROLLING A BLASTING NETWORK

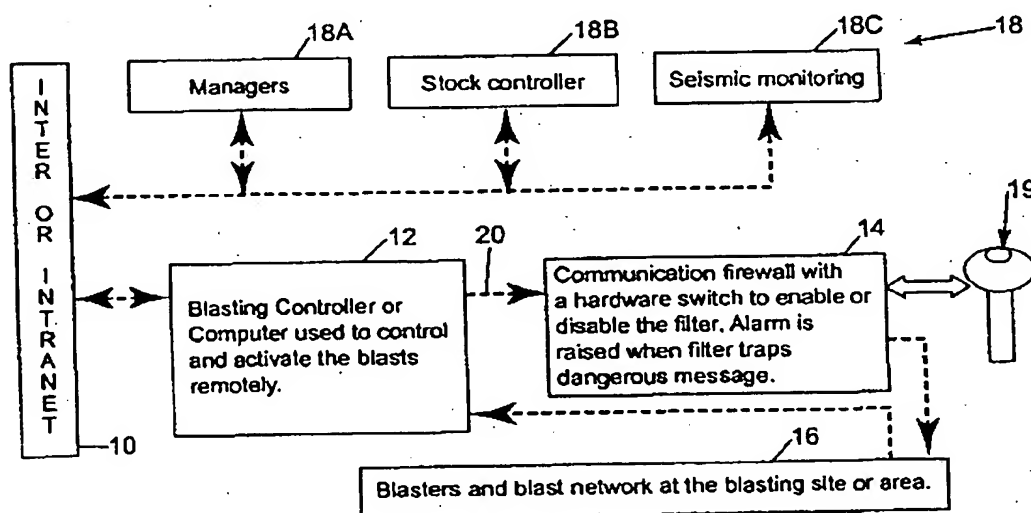

(57) Abstract

A method and system for controlling a blasting network (16) for use where spurious command signals may be passed through a blasting controller (12) to the blasting network, for example when the controller is connected to the Internet or Intranet (10). The system includes a firewall (14) whereby the communication link (20) between the controller and the blasting network can be placed in a control mode by a switch (19). In the control mode, any previously designated unsafe message such as a fire command is prevented from reaching the blasting network by, for example, disregarding the unsafe message or scrambling it so that it is no longer unsafe. In an operational mode of the communication link, any scrambled unsafe message may be unscrambled and any unsafe message may be transmitted to the blasting network.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT:

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TC	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## METHOD OF AND SYSTEM FOR CONTROLLING A BLASTING NETWORK

### Technical Field

- 5 This invention relates generally to a blasting system and is particularly concerned with a method of and system for controlling the operation of a blasting network.

### Background of the Invention

- 10 For safety reasons a blast controlling system used for remotely controlling a blasting network has traditionally been isolated from other networks at a blasting site eg. at a mine. The data on the blasting system can however be used to monitor productivity, implement stock control and improve mining methods by making blast information available to those who need such information. It is also possible to schedule and initiate blasts from a central  
15 control facility through a suitable blast controlling system.

- Another possibility which arises particularly due to the fact that computers are being used as top level system controllers for distributed networks of blasters is to make use of a computer network using Internet or Intranet capabilities. There are however inherent risks  
20 associated with Internet connections. Chief of these is the risk that a hacker or unauthorised user may penetrate the system and deliberately or inadvertently generate an unsafe or dangerous command which can arm and fire the blasting system. This type of action can have catastrophic results.

### 25 Summary of the Invention

- The invention provides a method of controlling a blasting network which includes the steps of designating at least one unsafe message, placing a communication link to the network in a control mode, monitoring the communication link for the unsafe message, and preventing  
30 the unsafe message, when detected, from reaching the blasting network.

- 2 -

The invention also provides a system for controlling a blasting network which includes a communication link for the network, the communication link being capable of being placed in a control mode, and a monitoring device for monitoring the communication link for at least one previously designated unsafe message, and wherein the communication link, when in its control mode, prevents any detected unsafe message from being transmitted to the blasting network.

Further according to the present invention there is provided a blasting system including a control system as described in the immediately preceding paragraph connected to a blasting network.

In the control mode of the communication link, the or each unsafe message may be prevented from reaching the blasting network simply by ignoring the message and not allowing its onward transmission. Alternatively the or each unsafe message may be scrambled so that it is no longer in an unsafe form.

"Unsafe message", as used herein, is used to designate a message or command which, if received by the blasting network, could result in unwanted or adverse conditions or consequences. For example arm and fire commands, if received by the blasting network at an unwanted time, could cause a blast to be initiated in the presence of personnel and thereby result in death or injury.

Preferably therefore the method of the invention includes the step of designating at least two unsafe messages of which two are respectively equated with arm and fire commands.

The communication link is preferably able to be placed in an operational mode in which any previously designated unsafe message is allowed to be transmitted to and reach the blasting network.

In an operational mode of the communication link, in which unsafe messages are allowed to be transmitted to the blasting network, any previously scrambled unsafe message may

- 3 -

be detected and unscrambled prior to transmitting the unscrambled unsafe message to the blasting network.

5 The communication link may be connected to a control unit which is capable of generating legal unsafe messages, for example legitimate arm and fire commands. However, unsafe messages may be categorised as legal or illegal. The latter group of messages includes those which are illegally generated, for example those messages which arise from any source other than the control unit connected to the communication link.

#### 10 Brief Description of the Drawings

One embodiment of a control method and system according to the invention will now be described by way of example only with reference to the accompanying drawings in which:

15 Figure 1 is a block diagram of an electronic blasting system including one embodiment of a control system according to the invention;

Figure 2 is a block diagram of a communication fire wall for use in the control system of Figure 1;

Figure 3 is a logical flowchart of the operation of a filter, used in the control system of Figure 1, according to a first form of the control system; and

20 Figure 4 is a flowchart similar to that shown in Figure 3 for a variation of the control system.

#### Description of Preferred Embodiment

25 When a blasting system is connected to an Intranet or Internet facility, access is provided to information stored in a data base associated with the blasting system. This information is useful inter alia to managers, personnel involved in stores and production, seismic monitoring installations, logistical control units, etc.

30 A perceived risk with a connection of the aforementioned kind is that unauthorised users may hack through the network security to tamper with the blasting system which is a safety critical system. An unanticipated system fault may result in the safety of the system being

- 4 -

compromised and this may lead to the blasting system being fired prematurely which can cause injury or fatalities.

Modern networks provide high levels of user security but due to the complexities of such systems it is not always possible to carry out a complete exhaustive safety analysis of the control software, operating systems and associated fire walls.

Figure 1 of the accompanying drawings illustrates in block diagram form a system which allows an Internet or Intranet connection to be made to a blasting network with improved safety.

The system includes an Internet or Intranet facility or connection arrangement 10, a blasting controller or control computer 12 which is used to control and activate blasts remotely, a communication fire wall 14, a blasting network 16, and a variety of interrogating terminals 18.

The blasting controller 12 is used in a known manner and includes a standard device employed to control the network 16 and to activate the initiation thereof, remotely. These aspects are known in the art and hence are not further described herein. Similarly the blasting network 16 consists of an assembly of detonators and communication devices installed in a known manner at a blasting site, making use of known technology.

The communication fire wall includes a locking device 19 for placing a communication link 20, which may be an electrical conductor, to the blasting network in a control mode, or in an operational mode, according to requirement. As used herein the expression "locking device" includes any switchable component or mechanism which allows the fire wall to be made operational, or to be rendered inoperational, according to requirement. The locking device may be operated using a key, by means of an electronic keypad requiring a password, or it may be a remotely activated switch on a private connection. Thus, in a general sense, the locking device may be mechanically or electronically operated.

- 5 -

The remote terminals 18 may vary according to requirement. The terminals may for example provide access, via an Internet connection, to the blasting network for managers 18A, stock controllers 18B, or a seismic monitoring unit 18C. These examples are merely illustrative and are not limiting.

5

Figure 2 illustrates further detail of the communication fire wall 14. The filter includes communication interfaces 22 and 24 which allow communication to take place with the communication link 20, an electronic filter 26 and, in this example, a locking device 19 which consists of a mechanical or electronic switch 28 which is activated by means of a mechanical or electronic key 30.

10

The operation of the electronic filter 26 is described hereinafter with reference to Figure 3 and a variation of such operation is described with reference to Figure 4.

15 As indicated, by connecting the blasting system 16 to the Internet 10 a potential safety risk is introduced due to the possibility being created that hackers can penetrate the system. This risk is eliminated, or at least substantially reduced, by making use of the communication fire wall 14 to selectively filter out unsafe or dangerous commands like "arm", which results in the blasting network being armed, and "fire" which causes the  
20 blasting network to be initiated.

It is to be noted that the communication medium and protocols used to communicate between the blast controlling system and the blasting network may be of any appropriate type capable of achieving reliable communication.

25

The communication interfaces allow the communication to interface with the electronic components incorporated in the filter 26. These electronic components may include a micro controller, programmable logic devices or discrete components. The choice of the electronic components is determined inter alia by the complexity of the communication  
30 protocol which is used.

- 6 -

Referring to Figure 3, data on the link 20 (block 32) is received from the communication interface 22 and is input to the filter 26. The filter waits for communication (34) and reads each message on the line (36). If a message is unsuccessfully read then the system returns to the mode at which it awaits communication.

5

Once a message is successfully read (block 38) a test is carried out to see if the filter 26 has been deactivated (step 40) to place the communication link 20 in its operational mode. As noted, the filter is deactivated by means of the mechanical key 30. When the filter is deactivated the communication link 20 is capable of transmitting designated unsafe or dangerous messages, such as arm and fire commands, which have been legally generated by means of the blasting computer 12, to the blasting network 16. Thus if the filter has been deactivated (step 42) any message received, regardless of its origin, is collected (block 44) and transmitted via the communication interface 24 as output data (46). The system then reverts to its waiting mode at which further messages are awaited.

15

On the other hand if the filter 26 is activated so that the communication link is in its control mode, any message received is tested to see whether it is safe or unsafe (step 48). Safe messages are collected and transmitted on the communication link (steps 44 and 46) to the communication interface 24. If a designated unsafe message is detected, it is collected but simply ignored (step 50). The system then reverts to the mode at which it waits for further communication.

20

If an unsafe or dangerous message is detected with the filter 26 activated then an alarm signal, visual or audible, is generated. A count is also kept of the number of unsafe messages detected.

25

With the control steps shown in Figure 3 the logic is such that unsafe messages which are detected when the filter is activated are assumed to be illegally generated and are ignored. Other messages are transmitted to the required destination via the communication interface 24. The system thus possesses the facility for allowing data associated with the blast network to be accessed from the remote points 18. The data may be located at the blasting controller 12 or at the blasting network 16. It is however not possible to transmit a

30



- 7 -

designated unsafe message to the network 16 unless the communication link 20 has been placed in its operational mode, ie. unless the filter 26 has been deactivated.

5 In the logical sequence shown in Figure 4 many of the steps are similar or identical to corresponding steps in the sequence shown in Figure 3 and consequently bear the same reference numerals. The flowchart shown in Figure 4 is however intended for use with a blasting controller 12 which scrambles designated unsafe messages. Thus, legally generated arm and fire commands, produced by the controller 12, may be transmitted to the blasting network 16 in a scrambled state when the filter 26 is activated, but these  
10 scrambled messages will be ignored since they will not be understood by the blasting network as arm and fire commands.

In the step 40 a test is carried out to see if the filter 26 is deactivated (ie the communication link 20 is in its operational mode) or activated (ie the communication link 20 is in its  
15 control mode). In the latter case a test is then carried out on the received message to see whether it contains a designated unsafe or dangerous command such as "fire" or "arm" (step 52). If the message is unsafe then, in step 54, the command is scrambled whereafter the scrambled command is collected and transmitted (steps 44 and 46). By scrambling an unsafe message, the unsafe message is converted into a safe message.

20

On the other hand if the received message is safe then no scrambling takes place and the message is transmitted in an unscrambled form to its destination.

If the filter has not been activated, so that the communication link is in its operational  
25 mode, a test is carried out in step 56 to determine whether the received message is a scrambled unsafe message such as a scrambled fire or arm command. A scrambled message is unscrambled (step 58) and is then transmitted to its destination via the communication interface 24. If the message is not a scrambled unsafe message then, in step 52, a test is carried out to see if the message is an unsafe message in unscrambled  
30 form. If the test result is affirmative then it is assumed that the message has been illegally generated and, as before, the message is scrambled (step 54) before being transmitted. If

- 8 -

the test result is negative then the message is transmitted in the received form to its destination via the communication interface 24.

It follows that the locking device 19 is used to bypass the filter 26 when it is safe to blast.

- 5 The bypass is achieved by hard wiring the communication around the filter or by the filter sensing the status of the switch and then, based on the status, filtering the dangerous commands out or unscrambling them.

- 10 If the filter has sufficient intelligence then it can send the arm and fire commands. It would therefore not be possible for an unauthorised user to initiate a blast. This could only be achieved by deactivating the fire wall via the mechanical or locking device 19.

- The control computer 12 may communicate directly with the filter 26. If there is no response from the filter then the control computer will not attempt communication with the  
15 blasting network. The filter can thus act as a software dongle. If, as is the case with the Figure 4 embodiment, dangerous legal messages are scrambled then the filter must be activated for the system to operate.

- It is to be noted that normal commands to query the blasting network and to determine the  
20 status of components at the blasting site are unaffected. Once the blast area is clear the mechanical or electrical key is used to disable the filtering action and unblock the commands. The arm and fire commands may now be sent through the filter via the blast network to the blasting equipment. The control computer will scramble the dangerous commands. The filter, when unblocked, will correct the scrambled commands. If the filter  
25 is deactivated the scrambled dangerous commands will be sent to the blasting network. The blasting network will disregard these commands.

- In the Figure 4 embodiment, an illegally generated unsafe message, that is an unsafe message not generated by the blasting controller 12, would have to have the same  
30 scrambled format as a legally generated scrambled unsafe message to initiate blasting once it has been unscrambled.

In the embodiments of the invention described with reference to Figures 3 and 4, the filter 26 is activated to place it in the safe or control mode in which unsafe messages can not be transmitted to the blasting network 16 and deactivated to place it in the unsafe or operational mode in which unsafe messages are transmitted. However, it is to be understood that the filter 26 may be one in which the safe or control mode is achieved by deactivating or otherwise switching the filter and the unsafe or operational mode is achieved by activating or otherwise switching the filter. In other words, what is important in this respect is merely that the filter can be switched between control and operational modes.

10

Those skilled in the art will appreciate that the invention described herein is susceptible to variations and modifications other than those specifically described. It is to be understood that the invention includes all such variations and modifications which fall within its spirit and scope.

15

## CLAIMS:


1. A method of controlling a blasting network which includes the steps of designating at least one unsafe message, placing a communication link to the network in a control mode, monitoring the communication link for the unsafe message, and preventing the unsafe message when detected, from reaching the blasting network.  
5
2. A method according to claim 1 which includes the step of placing the communication link in an operational mode in which any previously designated unsafe message is allowed to reach the blasting network.  
10
3. A method according to claim 1 or claim 2 wherein in the control mode of the communication link the or each unsafe message is prevented from reaching the blasting network by preventing the onward transmission of the unsafe message.  
15
4. A method according to claim 1 or claim 2 wherein in the control mode of the communication link the or each unsafe message is prevented from reaching the blasting network by scrambling the or each designated unsafe message so that it is no longer unsafe.  
20
5. A method according to claim 4 which includes in an operational mode of the communication link in which unsafe messages are allowed to reach the blasting network the steps of detecting a scrambled unsafe message, unscrambling the detected scrambled unsafe message, and transmitting the unscrambled unsafe message to the blasting network.  
25
6. A method according to any one of claims 1 to 5 which includes the step of designating at least two unsafe messages.
7. A method according to claim 6 wherein two designated unsafe messages are  
30 respectively equated with arm and fire commands.


- 11 -

8. A system for controlling a blasting network which includes a communication link for the network, the communication link being capable of being placed in a control mode, and a monitoring device for monitoring the communication link for at least one previously designated unsafe message, and wherein the communication link, when in its control mode, prevents any detected unsafe message from being transmitted to the blasting network.
9. A control system according to claim 8 wherein the communication link is capable of being placed in an operational mode in which any previously designated unsafe message is allowed to be transmitted to the blasting network.
10. A control system according to claim 8 or claim 9 wherein in the control mode of the communication link the or each unsafe message, when detected, is ignored.
11. A control system according to claim 8 or claim 9 wherein the or each unsafe message, when detected, is scrambled.
12. A control system according to claim 11 wherein in an operational mode of the communication link in which unsafe messages are allowed to be transmitted to the blasting network any scrambled unsafe message is detected and unscrambled for transmission of the unscrambled unsafe message to the blasting network.
13. A control system according to any one of claims 8 to 12 wherein the communication link is connected to a control unit which is capable of generating legal unsafe messages.
14. A control system according to any one of claims 8 to 13 wherein the monitoring device is a filter.
15. A control system according to any one of claims 8 to 14 wherein the communication link is placed in its control mode by means of a switch.

- 12 -

16. A blasting system including a control system according to any one of claims 8 to 15 connected to a blasting network.

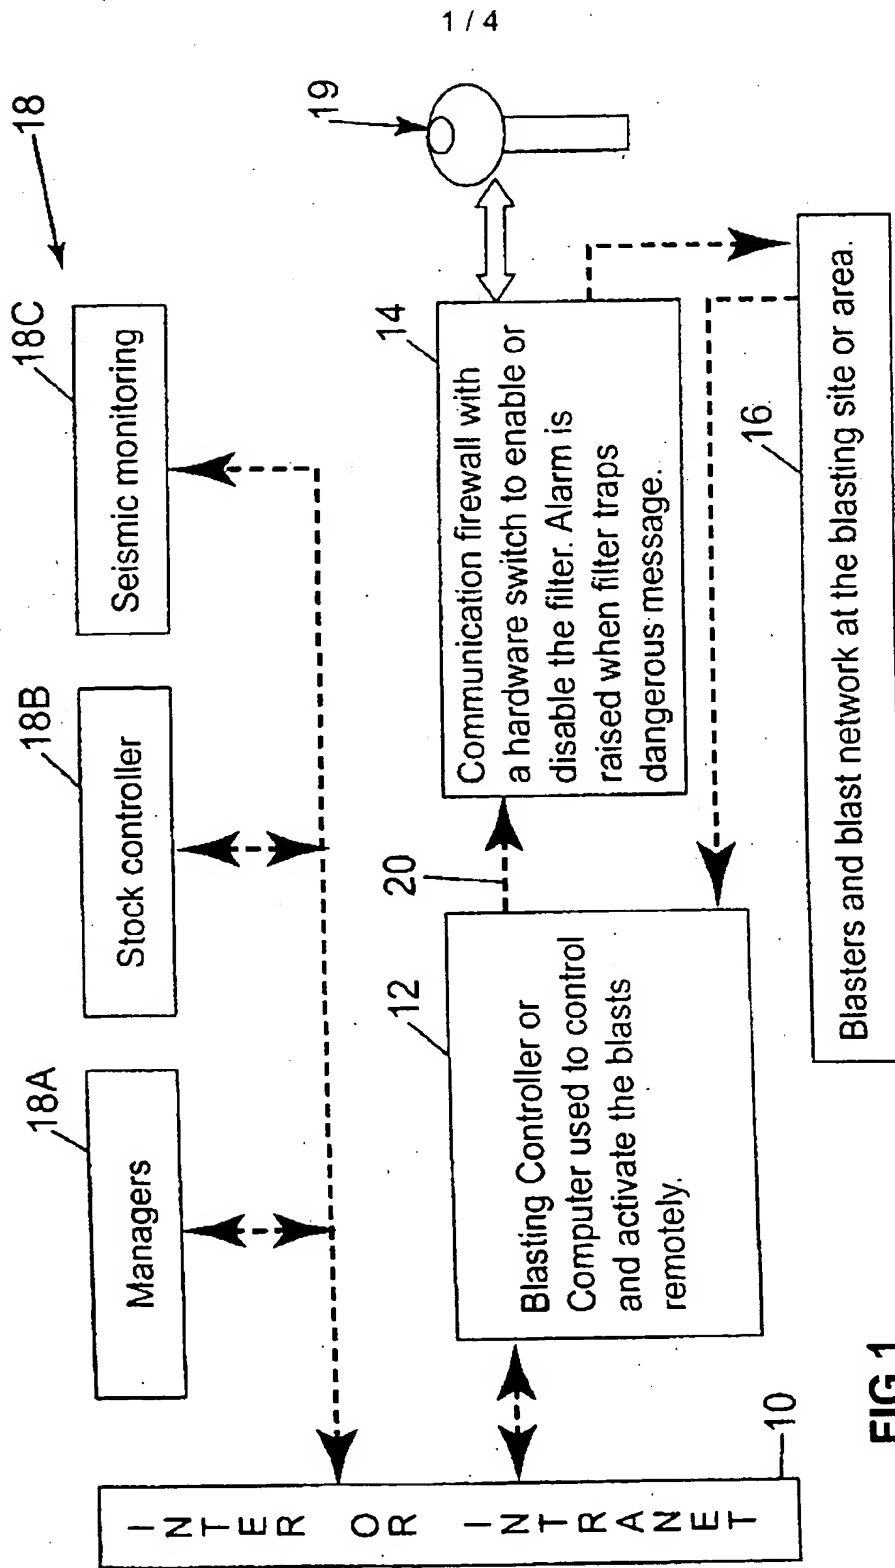**FIG 1**

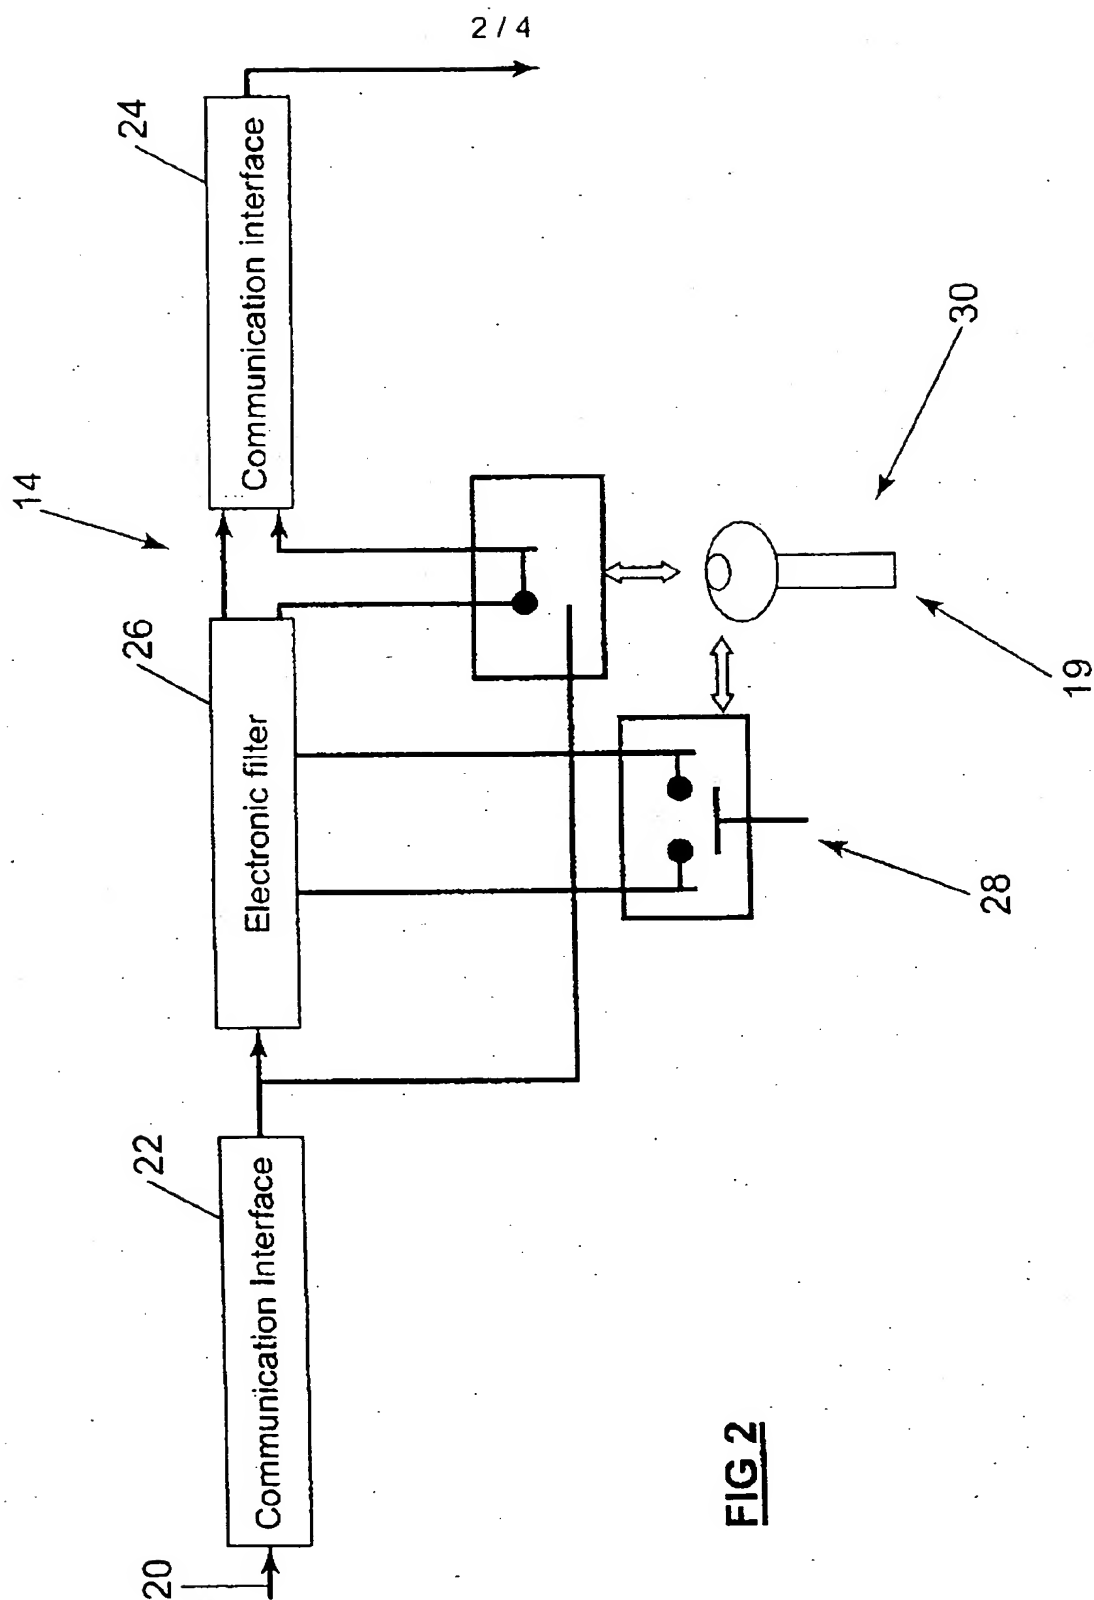

**FIG 2**



3 / 4

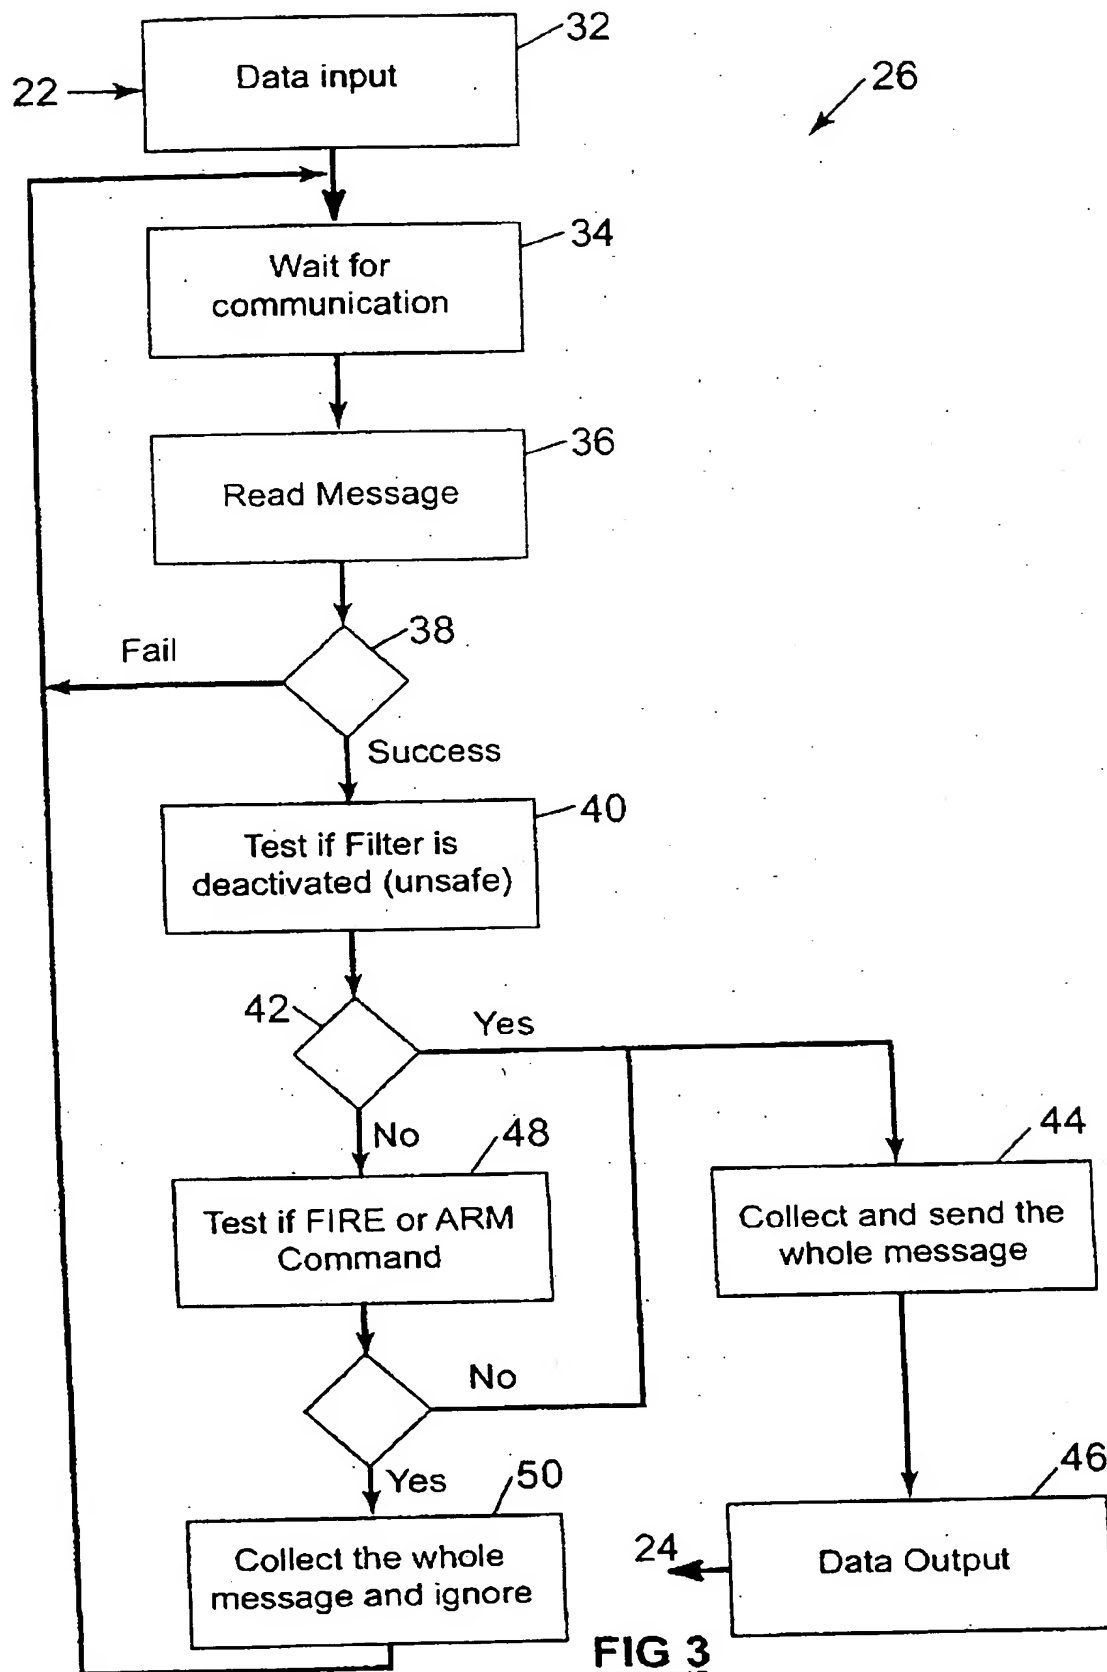
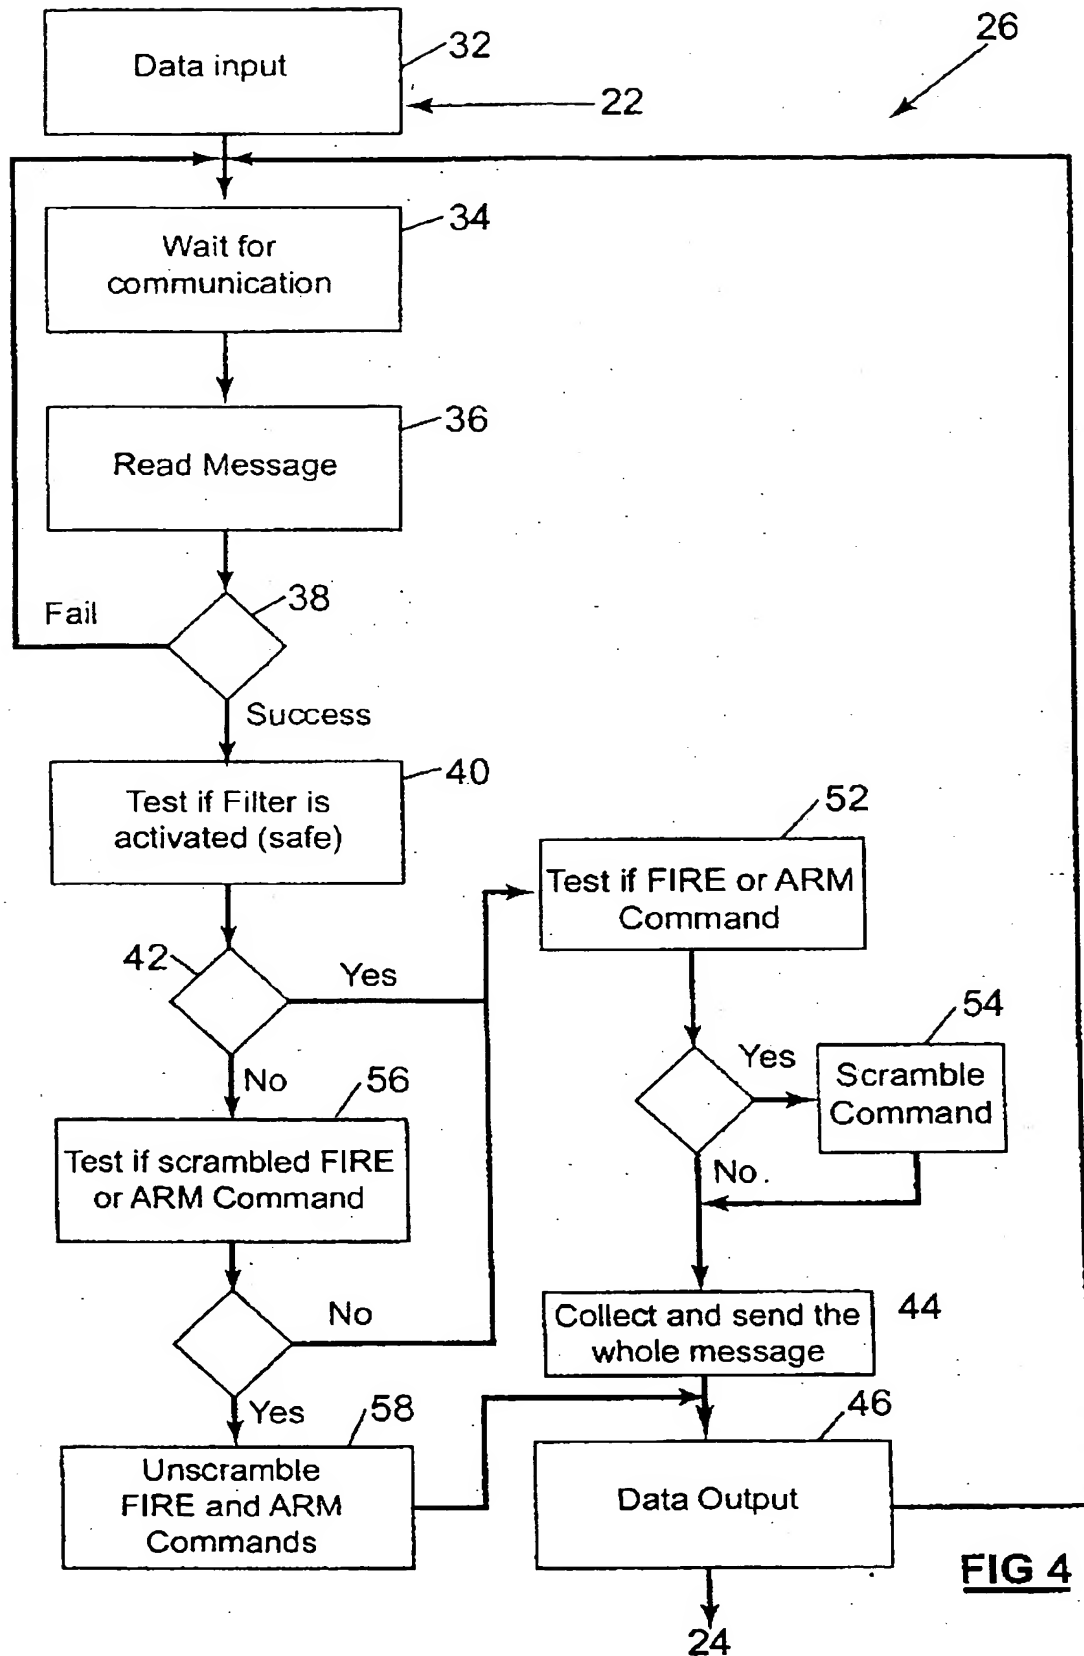


FIG 3

**FIG 4**

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00351

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
Int. Cl. <sup>7</sup> : F42D 5/00, 1/045; F42C 15/42		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
IPC: F42D 5/00, 1/04, 1/045; F42C 15/40, 15/42		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
AU: IPC as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
DWPI with keywords		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5404820 A (HENDRIX) 11 April 1995 Whole document	1-16
Y	US 4674047 A (TYLER et al) 16 June 1987 Whole document	1-16
Y	AU 59457/96 A (DRAKE et al) 23 January 1997 Whole document	1-16
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 12 May 2000		Date of mailing of the international search report 24 MAY 2000
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6283 3929		Authorized officer JEFFREY CARL Telephone No : (02) 6283 2543

International application No.  
PCT/AU00/00351

Patent Document Cited in Search Report		Patent Family Member	
AU	59457/96	US	6006328
WO	97/04394		